

# BackUPS Pro Range

Introducing APC BackUPS Pro range with stunning looks and class leading features like LCD screen and Green features

BR1500G-IN, BR1000G-IN, BR24BPG-IN



**APC BackUPS Pro range offers great new features that no other UPS offers today**

- > Easy to understand LCD Screen
- > Great looks
- > Green features - saves electricity
- > Capacity to add a XL battery pack
- > PowerChute 3.0 Software
- > 6 Indian sockets

# BackUPS Pro Features

## LCD Screen

LCD Screen that is easy to understand. Now its easy to check the UPS parameters. Displays

- > Sensitivity setting
  - > Battery Charge
  - > Power Saving function on/off
  - > On-Line / On Battery
  - > Replace Battery
  - > Overload
  - > AVR
  - > Input / Output Voltage
  - > System Faults
  - > Mute On/Off
  - > Load in Watts & Percent



## Great looks

With its stunning looks it is sure to win a lot of admiration.


- > For once you can now showoff your UPS



## Green Feature

Programmable master outlet controls the slave outlet and switches off the load on slave outlet if the master goes in hibernation

- > Saves upto INR2000 in electricity bill every year

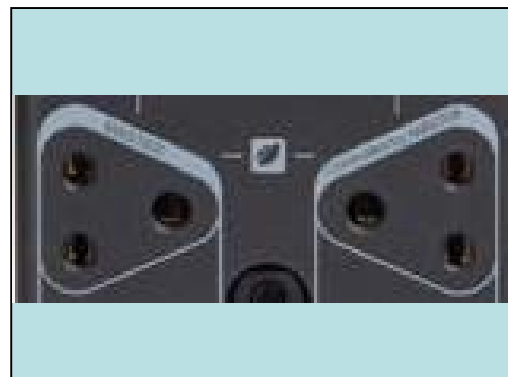


# BackUPS Pro Features

## Capability to add XL battery pack

Enhance runtime by adding BR24BPG-IN battery pack.

- > 9Ah x 4 Battery in the battery pack
- > Sold separately

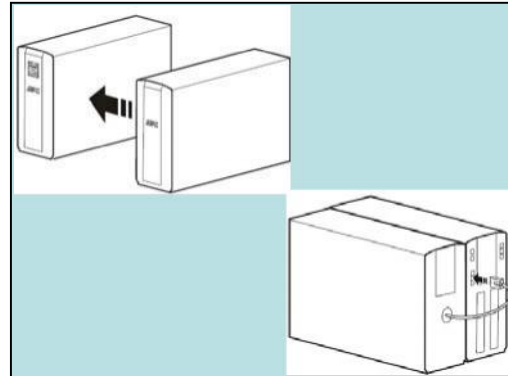

## PowerChute 3.0

Great new software that does more than just switching off the PC

- > Know your energy consumption
- > CO2 emission – knowing it is the first step to controlling it



## 6 nos 3 pin Indian Outlets

- > 4 Battery backed sockets
- > 2 Surge only sockets
- > Standard Indian 6A sockets



# Specifications

Model	BR1000G-IN	BR1500G-IN
VA	1000 VA	1500 VA
Maximum Load	600 W	865 W
Nominal Input Voltage	220 Vac-240 Vac	
Online Input Voltage Range	170 Vac to 294 Vac	
Automatic Voltage Regulation	182 Vac-216 Vac +17% 252 Vac-282 Vac -17%	
Frequency Range	50/60 Hz $\pm$ 1 Hz	
On-battery wave shape	Step-approximated sine-wave	
Typical Recharge Time	8 hours	
Transfer Time	10 ms, maximum	
Operating Temperature	0° to 40° C (32° to 104°F)	
Storage Temperature	-5° to 45° C (23° to 113° F)	
Unit Dimensions	30.1 × 11.2 × 38.2 cm (11.9 × 4.4 × 15 in)	
Unit Weight	12 kg (26 lbs)	
Interface	Serial, USB	

## Costa Power Industries Pvt Ltd.

201,Sainath Prasad Building,Opp Kasturi Plaza, Station Road,Dombivali - East 421201.

Cell No. 9372217661 / 9820710392

sales@upsbatteriesindia.com / sunil@upsbatteriesindia.com