

# GOLDI\_32GN - Polycrystalline Module

**GOLDI™**  
Renewed life

## Key Features

- Excellent module conversion efficiency.
- Up to +3% positive power output guaranteed.
- Reducing equipment loss increases the power generation in overall system.
- Loss minimization due to excellent temperature co-efficient.
- Better performance even at low irradiance condition.

## Quality & Reliability

- Manufactured in an ISO 9001:2015, ISO 14001:2015 & OHSAS 18001:2007 certified facility.
- IP65 rated junction box for long-term weather endurance.
- Manufactured using high grade raw materials from reputed international suppliers adopting a stringent quality criteria.
- Higher specific yield.
- Certified for IEC & BIS.

## Technical Data for GOLDI\_32 Cut Cell GN - Polycrystalline Module

### Electrical Parameter at STC

Module Type	GOLDI032CPY12				
Capacity rating - Pmax(Wp)	100	75	60	50	40
Power Tolerance (%)	0 - 3	0 - 3	0 - 3	0 - 3	0 - 3
Module efficiency (%)	16.35	14.74	15.04	14.69	14.15
Rated voltage - Vmp(V)	17.05	16.95	16.85	16.8	16.75
Rated current - Imp(A)	5.88	4.44	3.57	2.98	2.41
Open circuit voltage - Voc(V)	20.65	20.45	20.35	20.25	20.1
Short circuit current - Isc(A)	6.45	4.89	3.94	3.28	2.67
Operating Temperature	-40 to 85	-40 to 85	-40 to 85	-40 to 85	-40 to 85
Max. System Voltage	1000	1000	1000	1000	1000
Nominal Operating Cell Temp (NOCT)	45± 2	45± 2	45± 2	45± 2	45± 2
No of Cells	32	32	32	32	32
Cell Configuration	8*4	8*4	8*4	8*4	8*4
Module dimension Length (A)mm	920	765	600	512	425
Module dimension Width (B)mm	665	665	665	665	665
Module dimension Height ©mm	34	34	34	34	34
Mounting Hole Size (D)mm	6*12	6*12	6*12	6*12	6*12
Mounting Hole to Hole distance( Y- Pitch)mm	500	450	300	260	200
Mounting Hole to Hole distance( X- Pitch)mm	635	665	635	635	635
Module Weight Kg	7.5	6.2	4.7	4	3.5

### Mechanical specification

Solar cells	32 pcs Cut Polycrystalline Silicon, 5BB/4BB/3BB/2BB
Encapsulation	Ultra - clear PID free EVA (Ethylene-Vinyl-Acetate)
Backside	UV protected reflective backsheet
Frame	Silver Anodized Aluminium Alloy (screwless)
Front glass	3.2 mm, High Transmission Tempered Glass
Application Class	Class A
Fire Safety	Class C ( Type 1)
J-box	IP 65 rated junction box
Surface load	(snow load 5400 Pa, wind load 2400 Pa).

### Permissible operating conditions

Temp.Coefficient of Pmax	%/°C	-0.38
Temp.Coefficient of Voc	%/°C	-0.30
Temp.Coefficient of Isc	%/°C	0.05

Temperature range	-40°C to + 85°C
Hail resistance	Maximum diameter of 25 mm with velocity 23 m/s
NOCT	45± 2°C


Under Standard Test Conditions (STC) of irradiance of 1000 W/m², Spectrum AM 1.5 and cell temperature of 25°C.

Packing information		
Packing	Primary box	Master box
Quantity (Nos)	1	5

### Guarantees and certifications

Product warranty**	5 years
Performance guarantee**	Limited warranty for power output :- 90% for 10 years, and 80% for 25 years
Product Certified	IEC 61215, IEC 61730, IEC 61701, CE, BIS

### Drawing measurement in mm

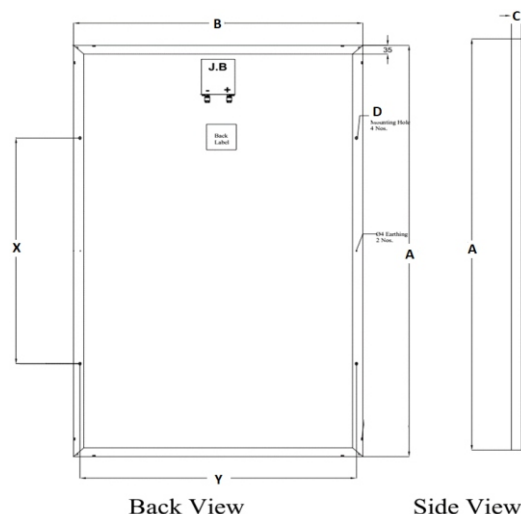

**COSTA POWER INDUSTRIES PVT. LTD.**

209, 2nd Floor, Infinity Business Park, Behind Pendharkar College,  
MIDC Phase - 1, Dombivli(E), Thane - 421023.  
Phone No. - 9820710392 / 9372217661.  
Email - sales@upsbatteriesindia.com / sunil@upsbatteriesindia.com.